


PILOT-TO-OPEN CHECK CARTRIDGE
浮動型-插式導壓開單向閥

Pilot-To-Open Check Cartridge 浮動型-插式導壓開單向閥





Model code 產品型號	Cavity 閥孔型號	Capacity 流量	Cartridge Dimensions 外型尺寸	
			a	
			X	L
CK2B	T11A	60L/min	31	64
CK3B	T2A	120L/min	35	72
CK6B	T17A	240L/min	46	84
CK8B	T19A	480L/min	59	100

Ordering Code 型號說明 CK 1 2B 3B 2 T11A T2A 3 X 4 C 5 N 6

- Model Code**
插式導壓開單向閥
- Specification**
規格 2, 3, 6, 8
- Cavity**
閥孔型號 T11A, T2A, T17A, T19A
- Controls**
控制方式 X: 標準導壓 X: Standard Pilot L: 手動洩載 L: Manual Load Release
- Adjustment Ranges**
調整範圍 A: 0.3bar, C: 2.0bar, E: 5.0bar
- Seals**
油封材質 N: Buna-N V: Viton

Dimension 外型尺寸 CK2B Cavities Tooling 浮動型插式3口閥孔尺寸圖

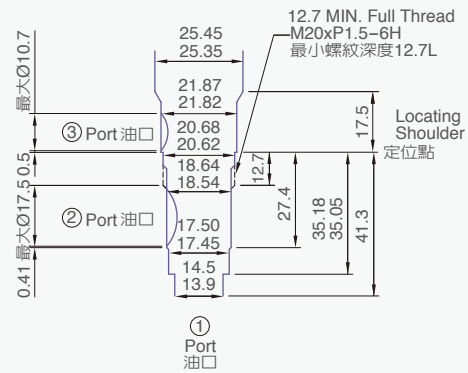
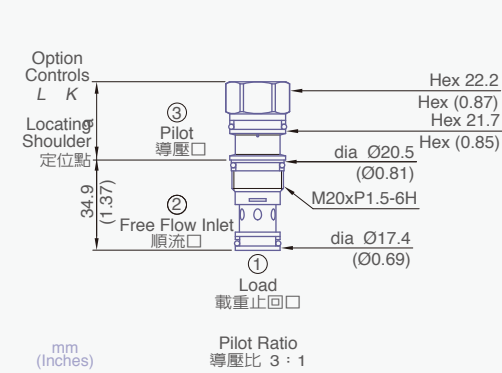


CK2B-T11A
CK3B-T2A



Specifications 技術數據

	Max. pressure 最高壓力	Max. flow 最大流量	Max. flow 安裝扭矩	Operating temperature 溫度範圍	kg 重量
	(bar)	Litres/min	(Nm)		(lbs)
CK2B	350	60 L/min	40/50	-35~100°C (-31~212°F)	0.13 (0.29)
CK3B	350	120 L/min	60/70	-35~100°C (-31~212°F)	0.24 (0.53)

Typical Pressure Drop 壓降曲線

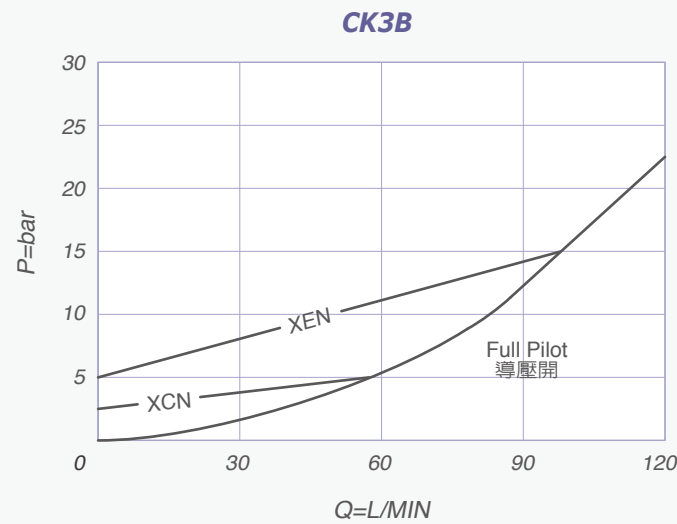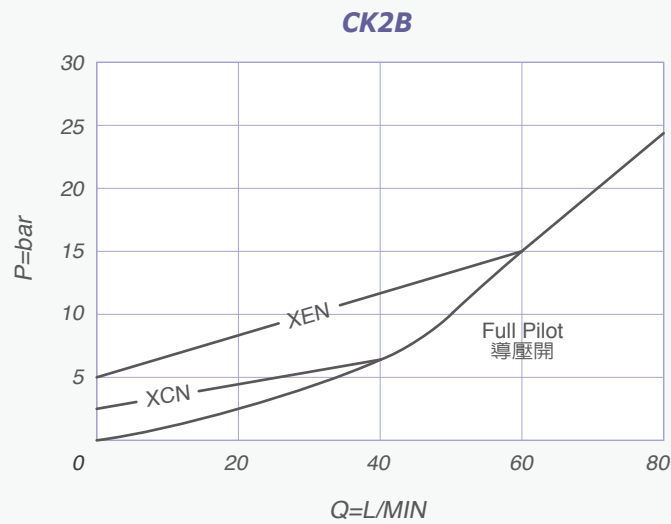


Dimension 外型尺寸 CK3B Cavities Tooling 浮動型插式3口閥孔尺寸圖

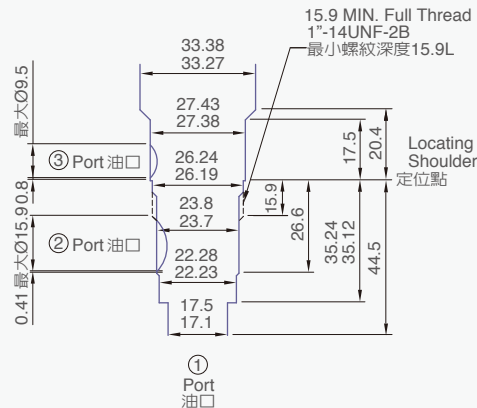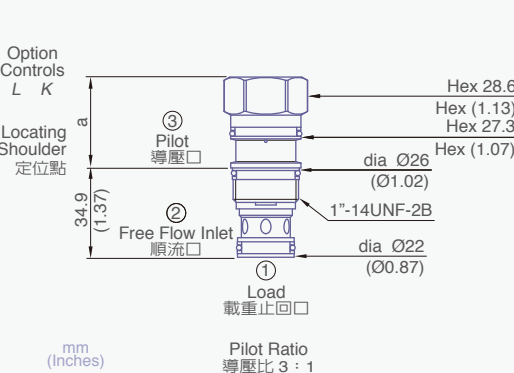

PILOT-TO-OPEN CHECK CARTRIDGE
浮動型-插式導壓開單向閥

Pilot-To-Open Check Cartridge 浮動型-插式導壓開單向閥




Model code 產品型號	Cavity 閥孔型號	Capacity 流量	Cartridge Dimensions 外型尺寸	
			a	
			X	L
CK2B	T11A	60L/min	31	64
CK3B	T2A	120L/min	35	72
CK6B	T17A	240L/min	46	84
CK8B	T19A	480L/min	59	100

Ordering Code 型號說明 CK 1 6B 2 T17A 3 X 4 C 5 N 6

- Model Code**
插式導壓開單向閥
- Specification**
規格 2, 3, 6, 8
- Cavity**
閥孔型號 T11A, T2A, T17A, T19A
- Controls**
控制方式 X: 標準導壓 X: Standard Pilot L: 手動洩載 L: Manual Load Release
- Adjustment Ranges**
調整範圍 A: 0.3bar, C: 2.0bar, E: 5.0bar
- Seals**
油封材質 N: Buna-N V: Viton

Dimension 外型尺寸 CK6B Cavities Tooling 浮動型插式3口閥孔尺寸圖

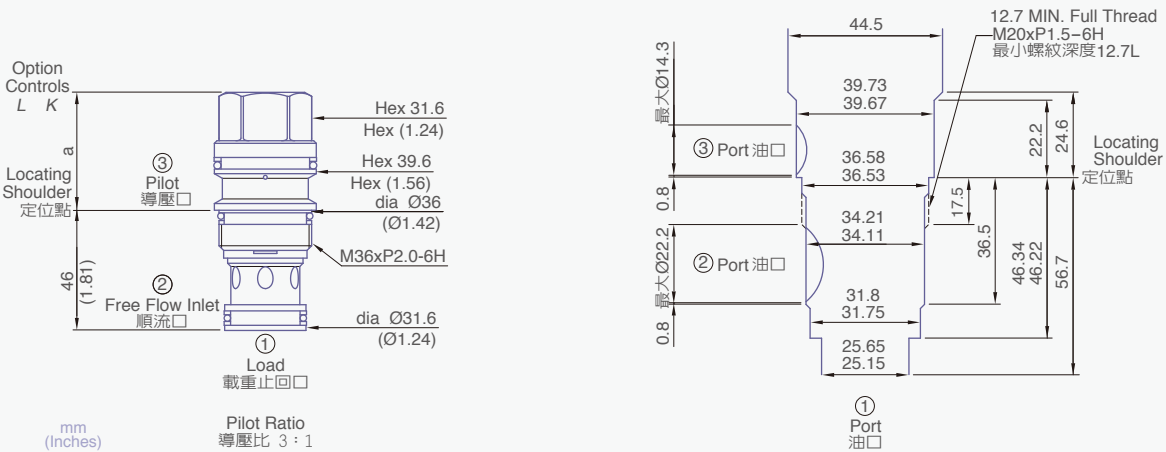


CK6B-T17A
CK8B-T19A

Specifications 技術數據

	Max. pressure 最高壓力	Max. flow 最大流量	Max. flow 安裝扭矩	Operating temperature 溫度範圍	kg 重量
	(bar)	Litres/min	(Nm)		(lbs)
CK6B	350	240 L/min	200/215	-35~100°C (-31~212°F)	0.53 (1.17)
CK8B	350	450 L/min	465/500	-35~100°C (-31~212°F)	1.16 (2.55)

Typical Pressure Drop 壓降曲線

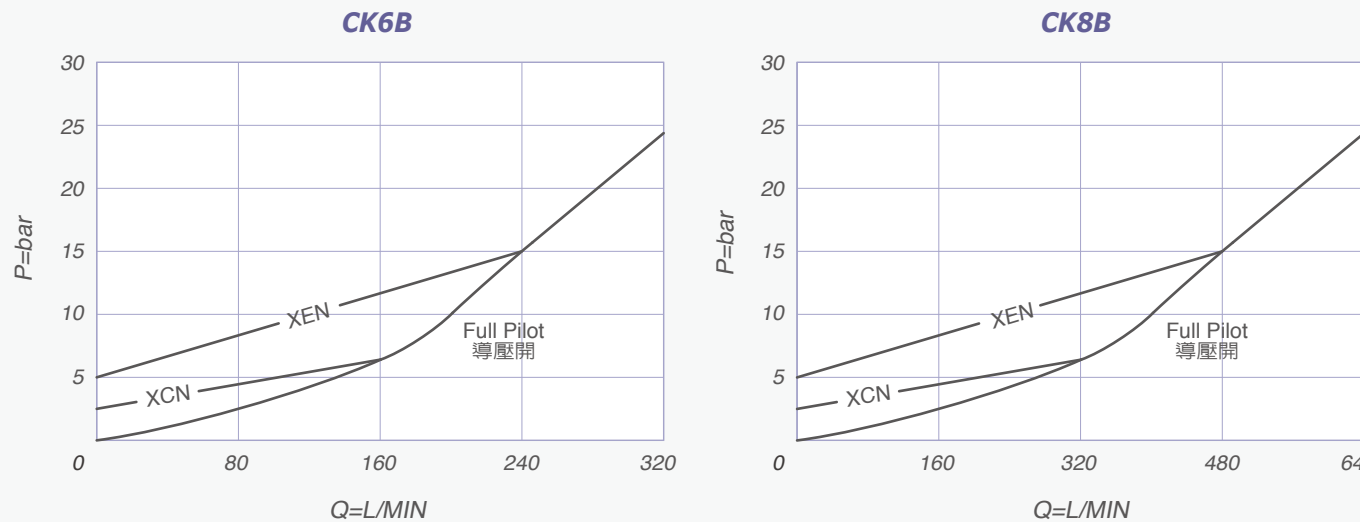

Dimension 外型尺寸 CK8B Cavities Tooling 浮動型插式3口閥孔尺寸圖

