


CHECK CARTRIDGE(FREE FLOW PORT2 TO PORT1)  
浮動型-單向閥(反流向)

Check Cartridge(Free Flow Port2 To Port1)

浮動型-單向閥(反流向)



| Model code<br>產品型號 | Cavity<br>閥孔型號 | Capacity<br>流量 | Cartridge Dimensions<br>外型尺寸 |
|--------------------|----------------|----------------|------------------------------|
|                    |                |                | a                            |
| CX2D               | T13A           | 60L/min        | 19                           |
| CX3D               | T5A            | 120L/min       | 18                           |
| CX6D               | T16A           | 240L/min       | 25                           |
| CX8D               | T18A           | 480L/min       | 31                           |

Ordering Code

型號說明

CX 1 2D 2 3D 2 T13A 3 T5A 3 X 4 C 5 N 6

1 Model Code  
插式單向閥(反流向)

2 Specifcation  
規格 2, 3, 6, 8

3 Cavity  
閥孔型號 T13A, T5A, T16A, T18A

4 Controls  
控制方式 X: 不可調  
X: Non Adjustable

5 Adjustment Ronges  
調整範圍 A: 0.3bar, B: 1.0bar, C: 2.0bar, D: 3.5bar, E: 5.0bar

6 Seals  
油封材質 N: Buna-N V: Viton


Dimension

外型尺寸

CX2D

Cavities Tooling

浮動型插式2口閥孔尺寸圖

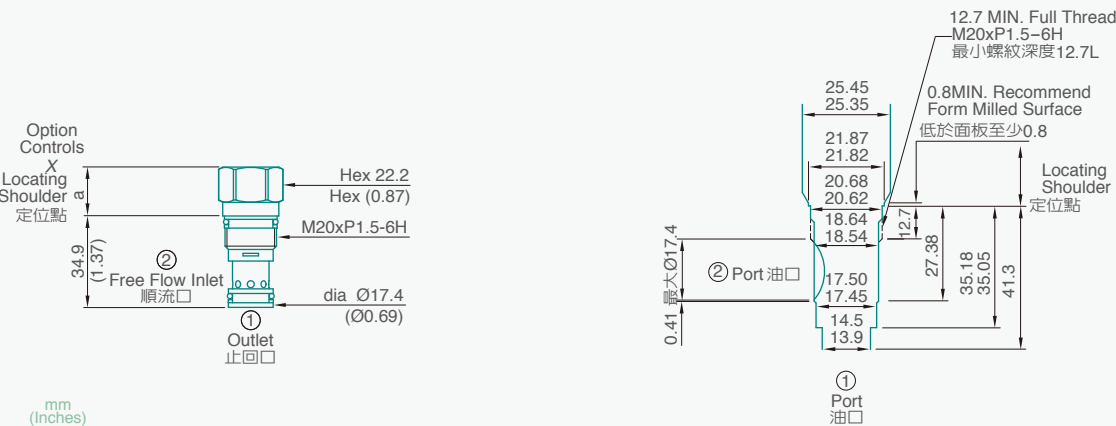

CX2D-T13A  
CX3D-T5A


Specifications

技術數據

|      | Max. pressure<br>最高壓力 | Max. flow<br>最大流量 | Max. flow<br>安裝扭矩 | Operating temperature<br>溫度範圍 | kg<br>重量   |
|------|-----------------------|-------------------|-------------------|-------------------------------|------------|
|      | (bar)                 | Litres/min        | (Nm)              |                               | (lbs)      |
| CX2D | 350                   | 60 L/min          | 40/50             | -35~100°C (-31~212°F)         | 0.12(0.26) |
| CX3D | 350                   | 120 L/min         | 60/70             | -35~100°C (-31~212°F)         | 0.18 (0.4) |

Typical Pressure Drop

壓降曲線

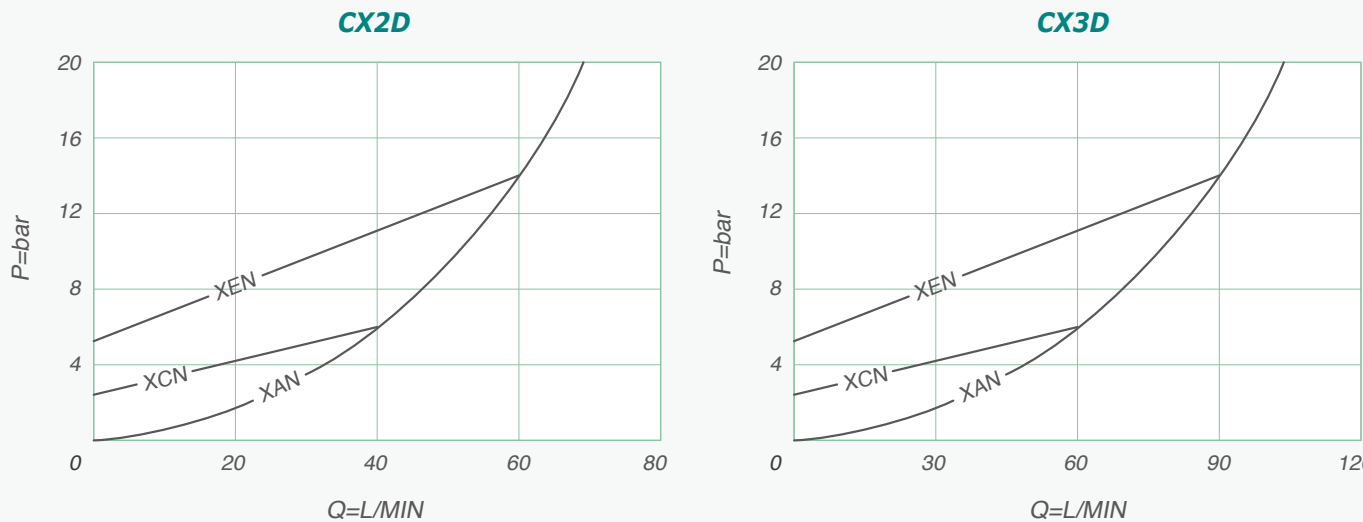


Dimension

外型尺寸

CX3D

Cavities Tooling


浮動型插式2口閥孔尺寸圖

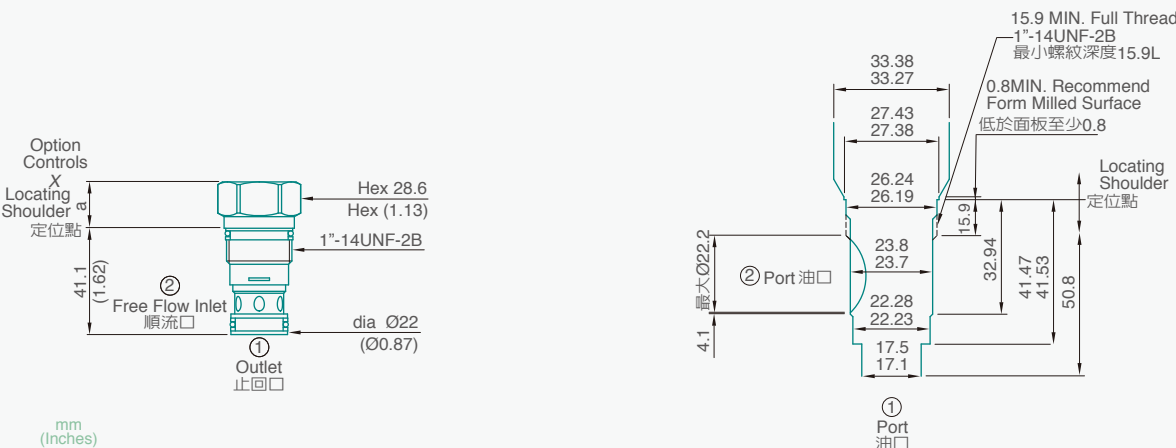

CHECK CARTRIDGE(FREE FLOW PORT2 TO PORT1)  
浮動型-單向閥(反流向)

Check Cartridge(Free Flow Port2 To Port1)

浮動型-單向閥(反流向)



| Model code<br>產品型號 | Cavity<br>閥孔型號 | Capacity<br>流量 | Cartridge Dimensions<br>外型尺寸 |
|--------------------|----------------|----------------|------------------------------|
|                    |                |                | a                            |
| CX2D               | T13A           | 60L/min        | 19                           |
| CX3D               | T5A            | 120L/min       | 18                           |
| CX6D               | T16A           | 240L/min       | 25                           |
| CX8D               | T18A           | 480L/min       | 31                           |

Ordering Code

型號說明

CX 1 6D 2 T16A 3 X 4 C 5 N 6

1 Model Code  
插式單向閥(反流向)

2 Specifcation  
規格

2, 3, 6, 8

3 Cavity  
閥孔型號

T13A, T5A, T16A, T18A

4 Controls  
控制方式

X: 不可調  
X: Non Adjustable

5 Adjustment Ranges  
調整範圍

A: 0.3bar, B: 1.0bar, C: 2.0bar, D: 3.5bar, E: 5.0bar

6 Seals  
油封材質

N: Buna-N V: Viton


Dimension

外型尺寸

CX6D

Cavities Tooling

浮動型插式2口閥孔尺寸圖

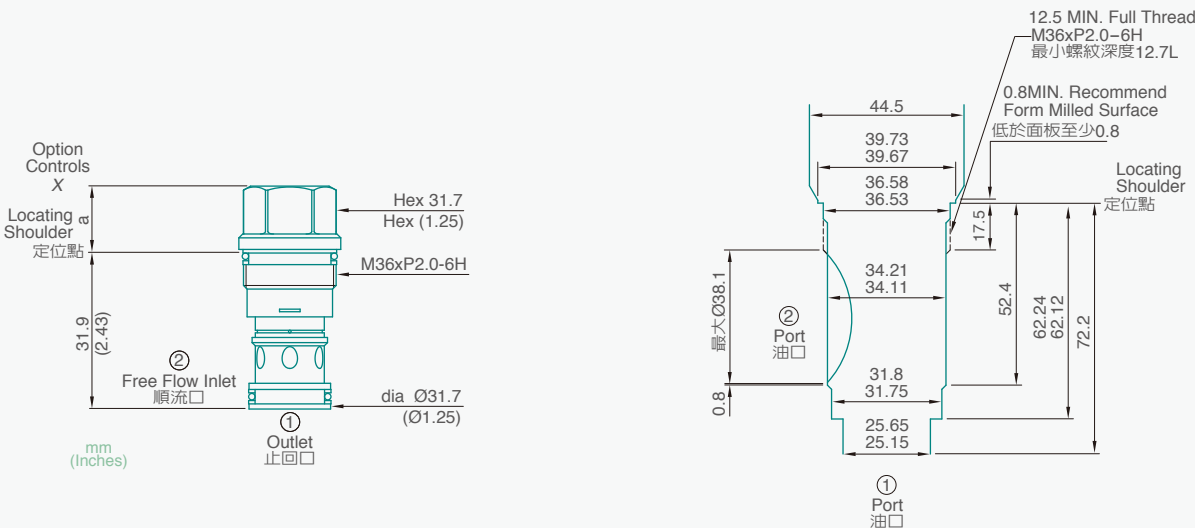

CX6D-T16A  
CX8D-T18A



Specifications

技術數據

|      | Max. pressure<br>最高壓力 | Max. flow<br>最大流量 | Max. flow<br>安裝扭矩 | Operating temperature<br>溫度範圍 | kg<br>重量   |
|------|-----------------------|-------------------|-------------------|-------------------------------|------------|
|      | (bar)                 | Litres/min        | (Nm)              |                               | (lbs)      |
| CX6D | 350                   | 60 L/min          | 40/50             | -35~100°C (-31~212°F)         | 0.12(0.26) |
| CX8D | 350                   | 120 L/min         | 60/70             | -35~100°C (-31~212°F)         | 0.18 (0.4) |

Typical Pressure Drop

壓降曲線

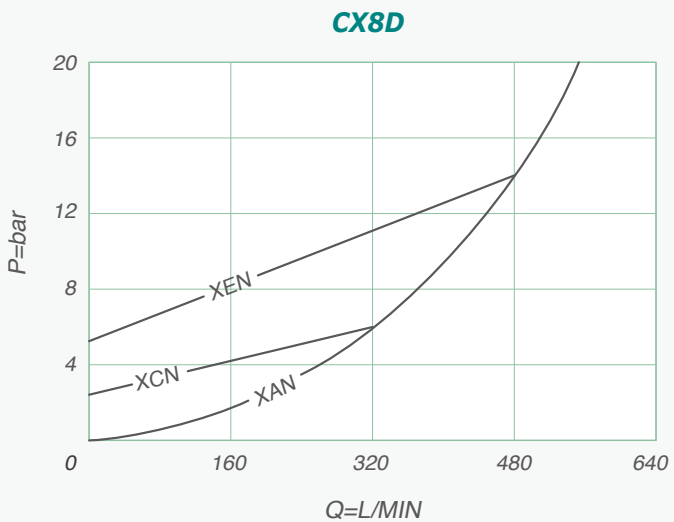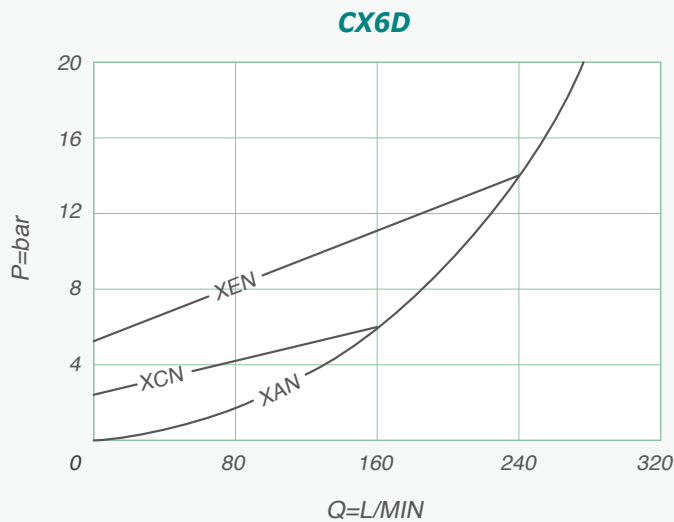

Dimension

外型尺寸

CX8D

Cavities Tooling

浮動型插式2口閥孔尺寸圖

