

VENTED, PILOT-TO-OPEN CHECK WITH EXTERNAL PILOT PORT


透氣型 導壓口外接 導壓開單向閥



CK-F

Technical Data

技術參數




Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension (mm) 尺寸			Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c			
CK2F	T11A	60	34.9	22.2	31	40/50	0.13	350
CK3F	T2A	120	34.9	28.6	35	60/70	0.24	350
CK6F	T17A	240	46.0	31.8	46	200/215	0.53	350
CK8F	T19A	480	63.5	41.3	59	465/500	1.16	350

Ordering Code

型號說明

CK 1 2F 2 T11A 3 V 4 C 5 N 6

- Model Code 產品型號
- Capacity (l/min) 流量
2: 60 3: 120 6: 240 8: 480
- Pilot Version 導壓型式
F: external pilot 導壓口外接
- Cavity 閥孔型號
T11A T2A T17A T19A
- Control 控制方式
V: external pilot port 外部接導壓管
- Cracking Pressure (bar) 開閥壓力
A: 0.3 C: 2.0 E: 5.0
- Seal 油封材質
N: buna-N V: viton

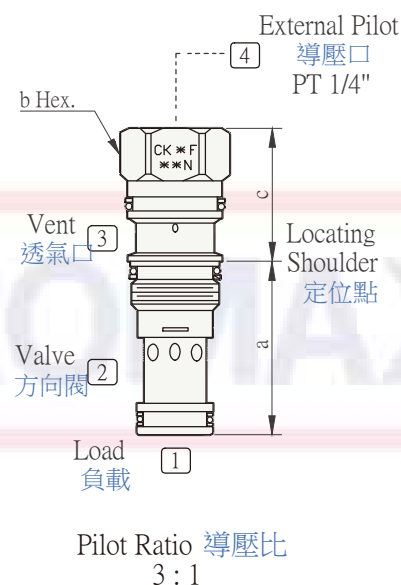

Pilot Ratio 導壓比
3 : 1

Performance Curves

性能曲線

