


DIRECT ACTING REDUCING/RELIEVING CARTRIDGE
浮動型-插式減洩壓閥(直動型)


Direct Acting Reducing/Relieving Cartridge 浮動型-插式減洩壓閥(直動型)

	Model code 產品型號	Cavity 閥孔型號	Capacity 流量	Cartridge Dimensions 外型尺寸	
				a	
				L	K
	PR2B	T11A	40L/min	79	85
	PR3B	T2A	80L/min	89	96
	PR6B	T17A	160L/min	100	107
	PR8B	T19A	320L/min	124	130

Ordering Code 型號說明 PR 1 2B 2 T11A 3 L 4 A 5 N 6

1	Model Code 插式平衡式減壓閥	
2	Specification 規格	2, 3, 6, 8
3	Cavity 閥孔型號	T11A, T2A, T17A, T19A
4	Controls 控制方式	L: 標準螺絲調整 L: Standard Screw Adjustment K: 調鈕調整 K: Handknob with Lock knob
5	Adjustment Ranges 調整範圍	A: 35~210bar, B: 6.5~105bar, C: 5~55bar, E: 3~25bar
6	Seals 油封材質	N: Buna-N V: Viton

Dimension 外型尺寸 PR2B Cavities Tooling 浮動型插式3口閥孔尺寸圖

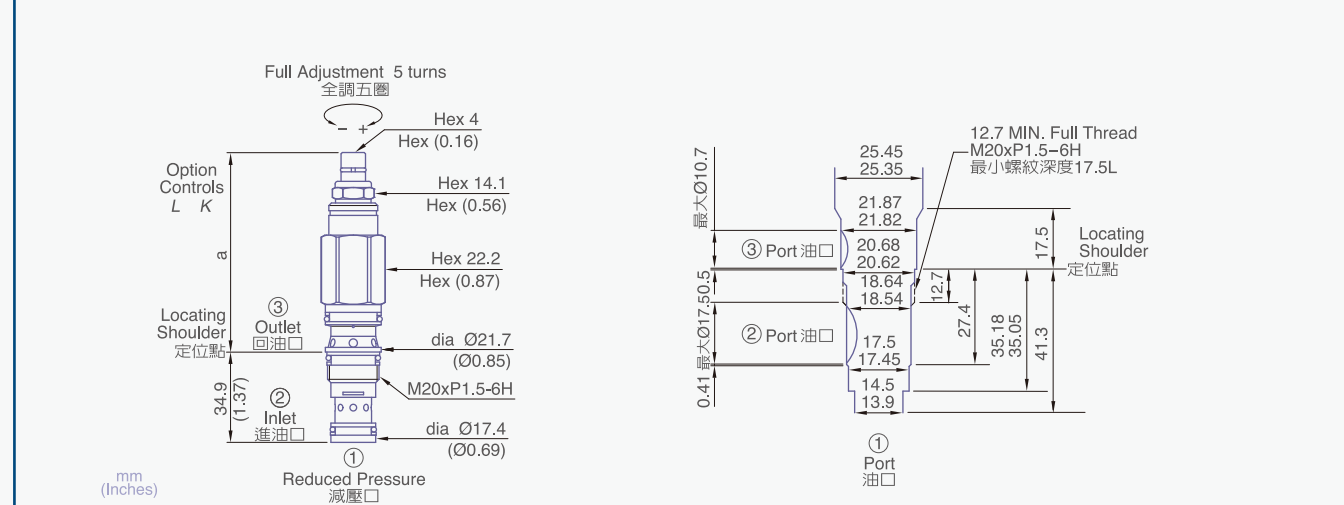


PR2B-T11A
PR3B-T2A


Specifications 技術數據

	Max. pressure 最高壓力	Max. flow 最大流量	Max. flow 安裝扭矩	Operating temperature 溫度範圍	kg 重量
PR2B	350	40 L/min	40/50	-35~100°C (-31~212°F)	0.20 (0.44)
PR3B	350	80 L/min	60/70	-35~100°C (-31~212°F)	0.36 (0.79)

Regulated Pressure 調壓曲線

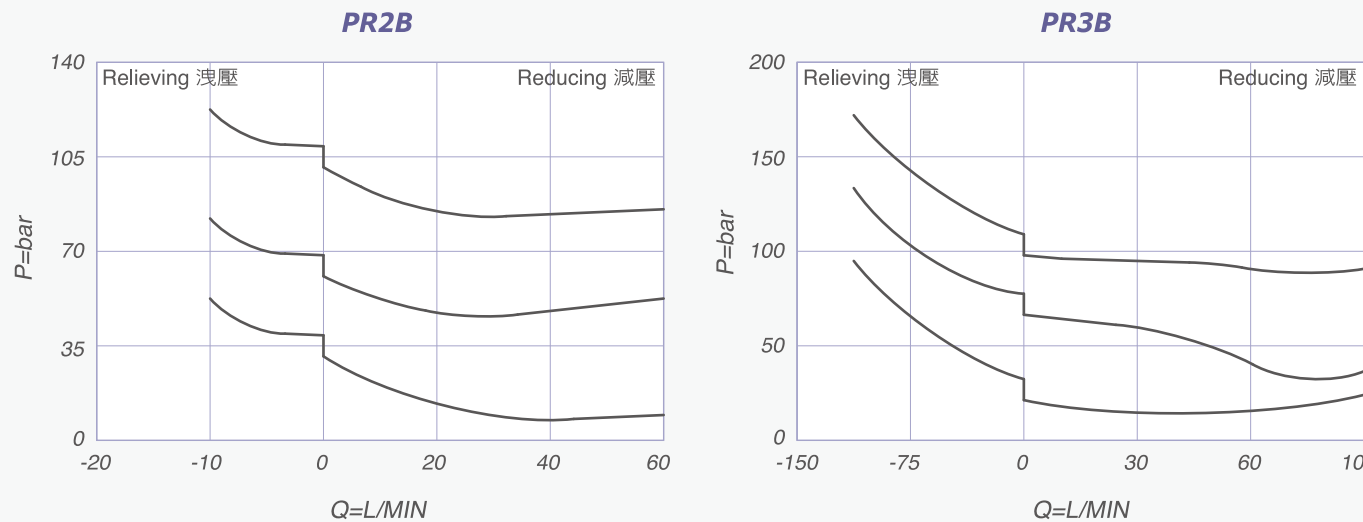

Dimension 外型尺寸 PR3B Cavities Tooling 浮動型插式3口閥孔尺寸圖

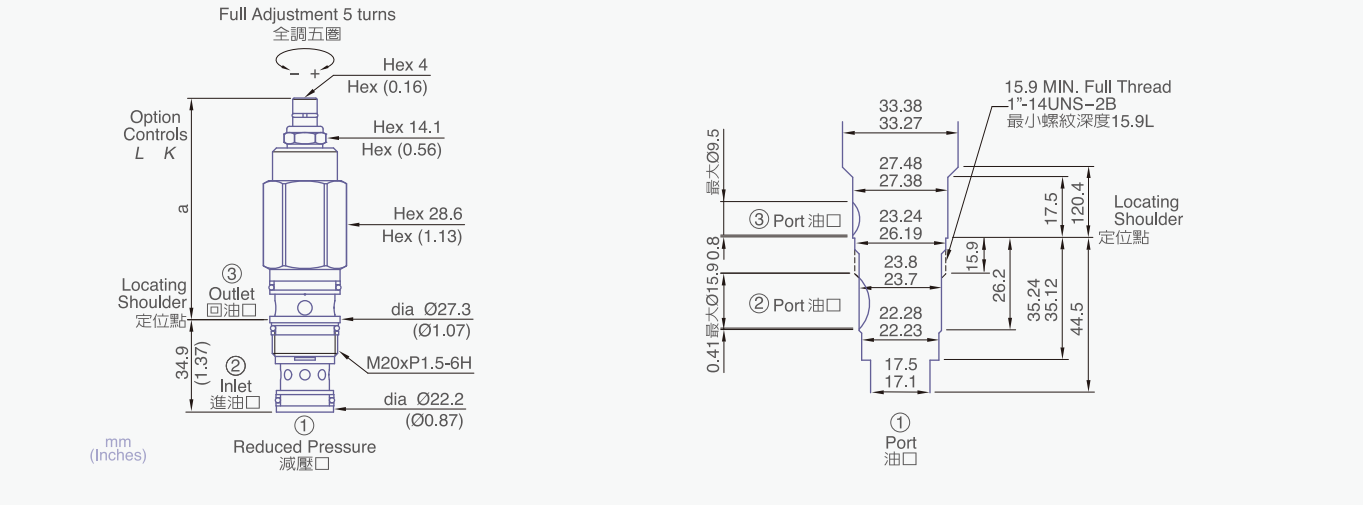


DIRECT ACTING REDUCING/RELIEVING CARTRIDGE 浮動型-插式減洩壓閥(直動型)

PR6B-T17A
PR8B-T19A

Direct Acting Reducing/Relieving Cartridge

浮動型-插式減洩壓閥(直動型)



Model code 產品型號	Cavity 閥孔型號	Capacity 流量	Cartridge Dimensions 外型尺寸	
			a	
			L	K
PR2B	T11A	40L/min	79	85
PR3B	T2A	80L/min	89	96
PR6B	T17A	160L/min	100	107
PR8B	T19A	320L/min	124	130

Ordering Code

型號說明

PR₁ **6B**₂ **T17A**₃ **L**₄ **A**₅ **N**₆

1 Model Code

2 Specification 規格

2, 3, 6, 8

3 Cavity 閥孔型號

T11A , T2A , T17A , T19A

4 Controls 控制方式

L: 標準螺絲調整
L: Standard Screw Adjustment

K: 調鈕調整
K: Handknob with Lock knob

5 Adjustment Ranges 調整範圍

A:35~210bar, B:6.5~105bar, C:5~55bar, E:3~25bar

6 Seals 油封材質

N: Buna-N V: Viton


Dimension

外型尺寸

PR6B

Cavities Tooling

浮動型插式3口閥孔尺寸圖

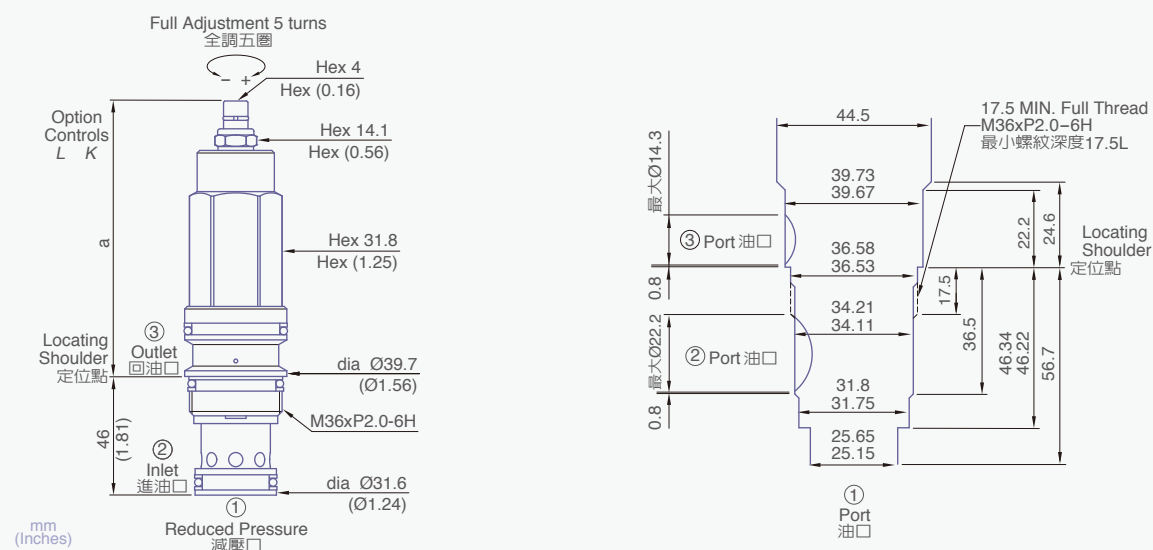



Specifications

技術數據

	Max. pressure 最高壓力	Max. flow 最大流量	Max. flow 安裝扭距	Operating temperature 溫度範圍	kg 重量
	(bar)	Litres/min	(Nm)		(lbs)
PR6B	350	160 L/min	200/215	-35~100°C (-31~212°F)	0.76 (1.67)
PR8B	350	320 L/min	465/500	-35~100°C (-31~212°F)	1.58 (3.48)

Regulated Pressure

調壓曲線

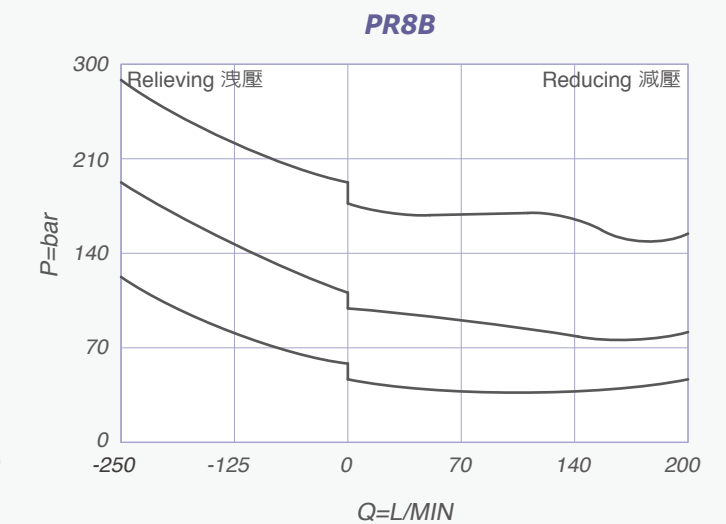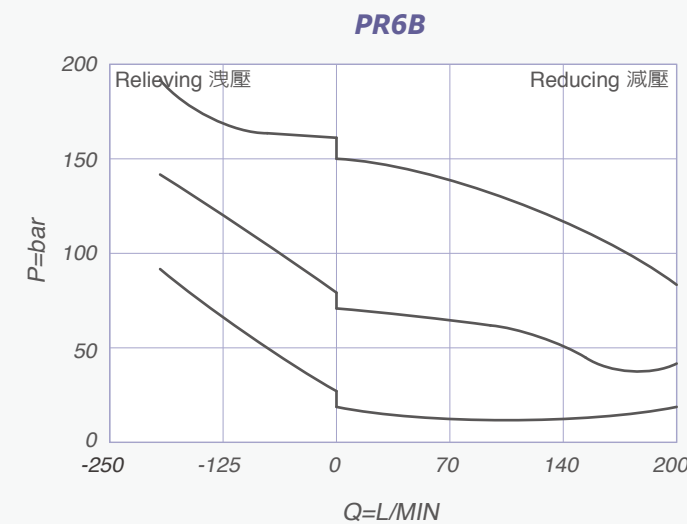

Dimension

外型尺寸

PR8B

Cavities Tooling

浮動型插式3口閥孔尺寸圖

