


PILOT OPERATED SEQUENCE CARTRIDGE

浮動型-插式順序閥 (導壓操作平衡活塞型)

Pilot Operated Sequence Cartridge 浮動型-插式順序閥 (導壓操作平衡活塞型)




Model code 產品型號	Cavity 閥孔型號	Capacity 流量	Cartridge Dimensions 外型尺寸	
			a	
			L	K
RS2C	T11A	60L/min	64	70
RS3C	T2A	120L/min	72	78
RS6C	T17A	240L/min	84	90
RS8C	T19A	480L/min	100	107

Ordering Code 型號說明 RS 1 2C 2 T11A 3 L 4 A 5 N 6

- Model Code**
插式平衡式閥
- Specification**
規格 2, 3, 6, 8
- Cavity**
閥孔型號 T11A, T2A, T17A, T19A
- Controls**
控制方式 L: 標準螺絲調整 K: 調鈕調整
L: Standard Screw Adjustment K: Handknob with Lock knob
- Adjustment Ranges**
調整範圍 A: 7~210bar, B: 3.5~105bar, C: 4~55bar, E: 10~315bar
- Seals**
油封材質 N: Buna-N V: Viton

Dimension 外型尺寸 RS2C Cavities Tooling 浮動型插式3口閥孔尺寸圖

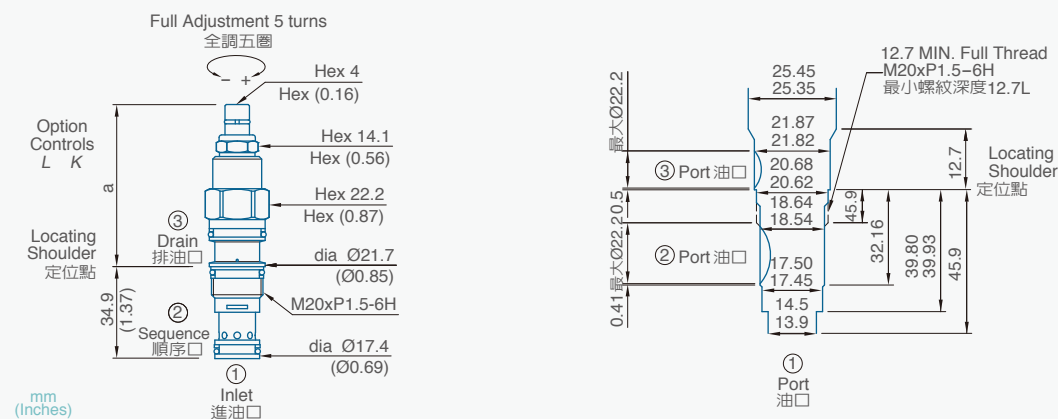


RS2C-T11A

RS3C-T2A


Specifications 技術數據

	Max. pressure 最高壓力	Max. flow 最大流量	Max. flow 安裝扭矩	Operating temperature 溫度範圍	kg 重量
	(bar)	Litres/min	(Nm)		(lbs)
RS2C	350	60 L/min	40/50	-35~100°C (-31~212°F)	0.17 (0.37)
RS3C	350	120 L/min	60/70	-35~100°C (-31~212°F)	0.30 (2.18)

Pressure Drop Full Sequence 順序口開時壓降曲線

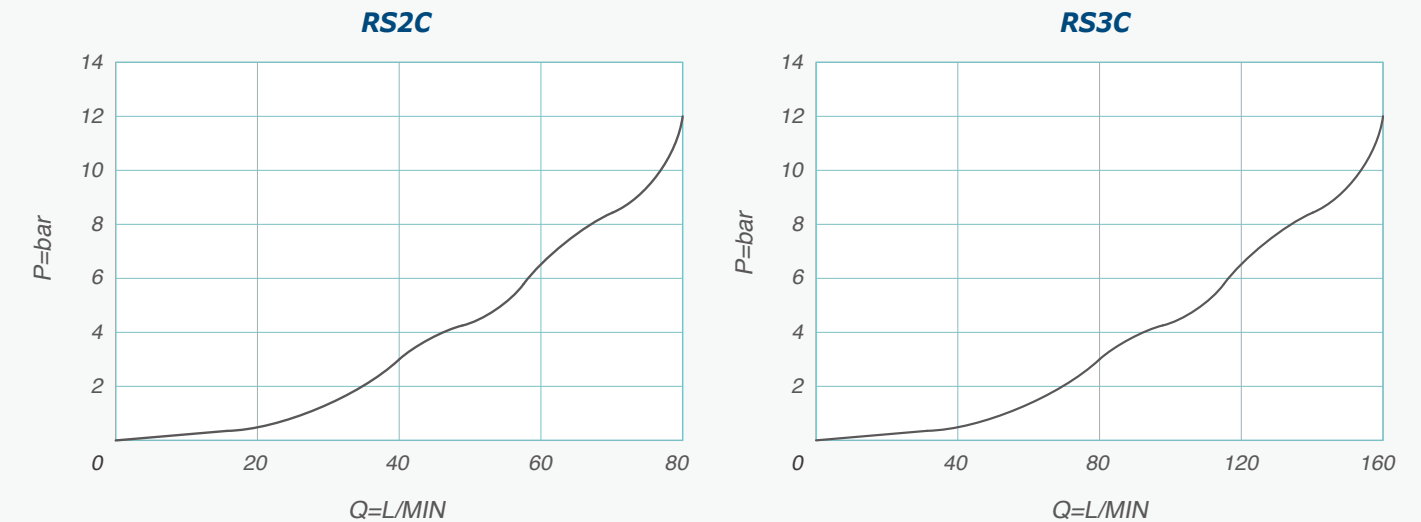

Dimension 外型尺寸 RS3C Cavities Tooling 浮動型插式3口閥孔尺寸圖

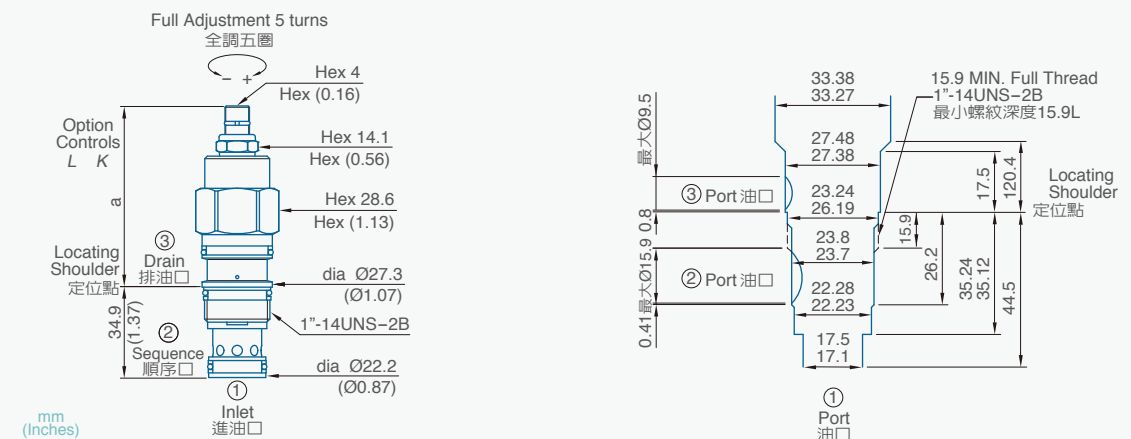


PILOT OPERATED SEQUENCE CARTRIDGE

浮動型-插式順序閥(導壓操作平衡活塞型)

RS6C-T17A
RS8C-T19A

Pilot Operated Sequence Cartridge

浮動型-插式順序閥(導壓操作平衡活塞型)



Model code 產品型號	Cavity 閥孔型號	Capacity 流量	Cartridge Dimensions 外型尺寸	
			a	
			L	K
RS2C	T11A	60L/min	64	70
RS3C	T2A	120L/min	72	78
RS6C	T17A	240L/min	84	90
RS8C	T19A	480L/min	100	107

Ordering Code

型號說明 RS 1 6C 2 T17A 3 L 4 A 5 N 6

- Model Code**
插式平衡式順序閥
- Specification**
規格 2, 3, 6, 8
- Cavity**
閥孔型號 T11A, T2A, T17A, T19A
- Controls**
控制方式 L: 標準螺絲調整 K: 調鈕調整
L: Standard Screw Adjustment K: Handknob with Lock knob
- Adjustment Ranges**
調整範圍 A: 7~210bar, B: 3.5~105bar, C: 4~55bar, E: 10~315bar
- Seals**
油封材質 N: Buna-N V: Viton


Dimension

外型尺寸

RS6C

Cavities Tooling

浮動型插式3口閥孔尺寸圖

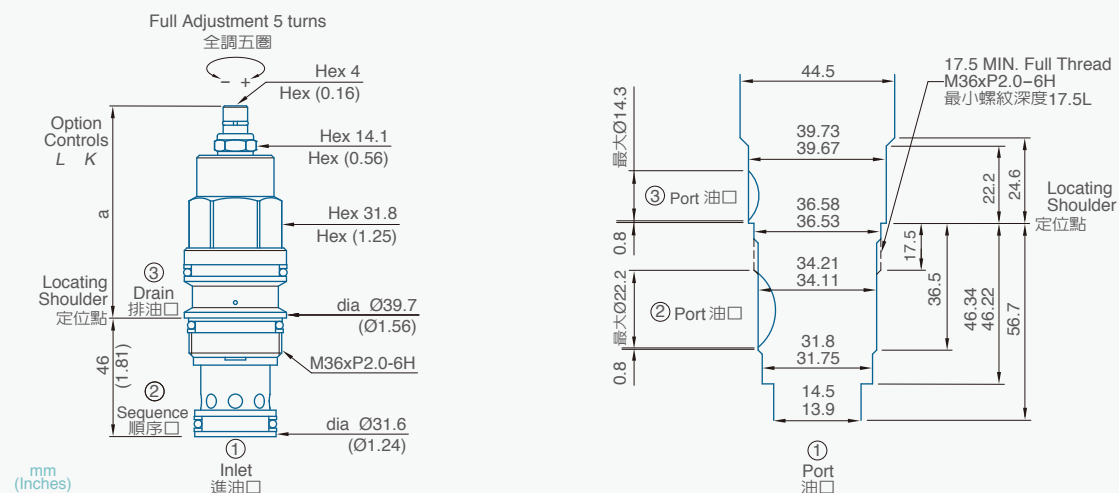


Specifications

技術數據

	Max. pressure 最高壓力	Max. flow 最大流量	Max. flow 安裝扭矩	Operating temperature 溫度範圍	kg 重量
	(bar)	Litres/min	(Nm)		(lbs)
RS6C	350	240 L/min	40/50	-35~100°C (-31~212°F)	0.17 (0.37)
RS8C	350	480 L/min	60/70	-35~100°C (-31~212°F)	0.30 (2.18)

Pressure Drop Full Sequence

順序口開時壓降曲線

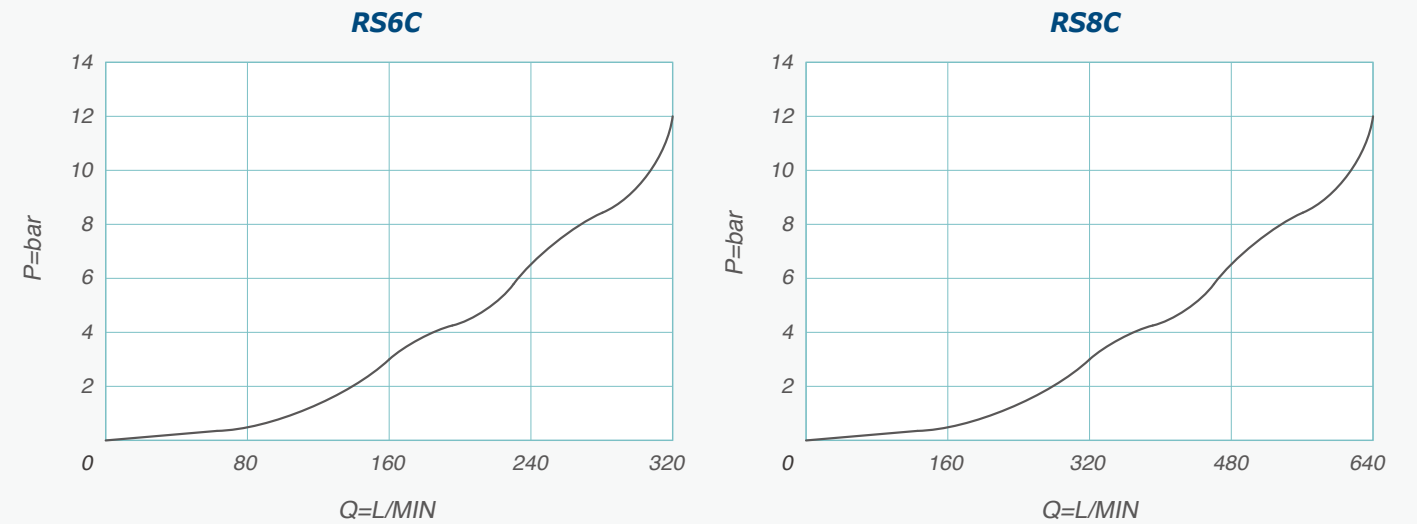

Dimension

外型尺寸

RS8C

Cavities Tooling

浮動型插式3口閥孔尺寸圖

