


CARTRIDGE SOLENOID CHECK VALVE

插入式電磁止回閥

V2033-T03 (HSV08)

Graphic Symbol 繪圖符號



Ordering Code 型號說明 V2033 1 T03 2 @ 3 # 4 * 5 D24 6 DG 7 25 8


1 Cartridge solenoid check valve 插入式電磁止回閥

V2033-T03(08W-3) 三口二位 Poppet 3-way

2 Manifold type 油路塊總類選項

T03:3分管式安裝

3 Operation 油路方向功能選項

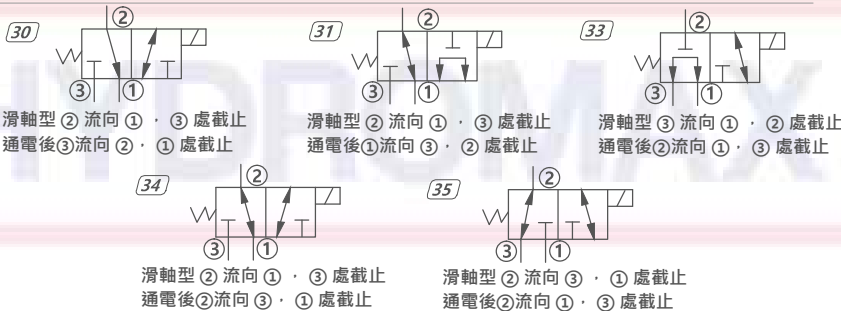

4 Option: with filter 附濾網裝置選項

S: With Filter 有濾網
N: Without Filter 無濾網

5 Option: with manual 附手動輔助裝置選項

P: Push-style Manual Override
P: 推 (向外推移式)
N: Option
N: 標準 (輔助裝置不可調)

M: Screw-out Konb Style
M: 旋鈕式 (開) 逆時鐘方向 ↺
Screw-in Konb Style
旋鈕式 (關) 順時鐘方向 ↻

T: Push and Twist Style
T: 推桿附扭轉
Manual Override
固定輔助裝置

6 Coil type 線圈型式

D12: DC12V A22: AC220V
D24: DC24V A38: AC380V
A24: AC24V RA1: AC110V
A11: AC110V RA2: AC220V

7 Terminations 接線方式

DG: DIN43650 插頭式
DL: Lead wires(2) 出線2條式

8 Max pressure 最高壓力





25: 250bar(3500psi)

Technical Data 技術參數

Max.Operating Pressure 最高壓力	Rated Flow 額定流量	Cavity-Tooling 成型孔	Installation Torque 安裝扭矩	Weight 重量
bar(psi)	(l /min)		(Nm)	(kg)
250(3500)	15 (V2033-30) 11 (V2033-31/33/35) 13 (V2033-34)	08W-3	39-51	0.51

Fluids-Temperatures 使用油溫範圍	Internal Leakage 最大內漏量	Filtration 過濾精度	Minimun Voltage Required 線圈需要的最低電壓
(°C)	80cc/minute	(um)	
-40~120°C	80cc/minute at 210bar	25	90% of nominal 額定電壓的90%

Specifications 技術數據

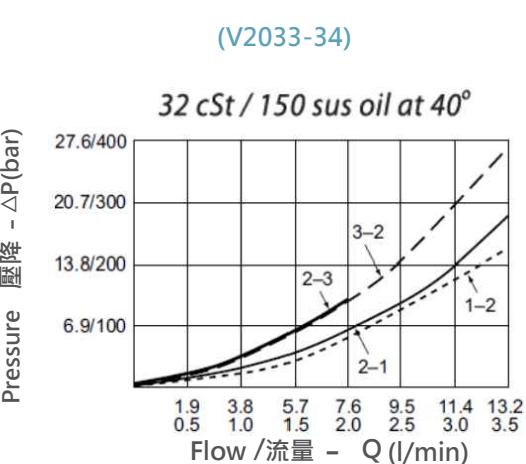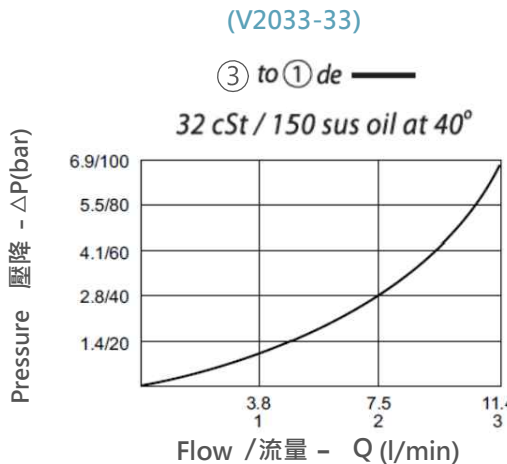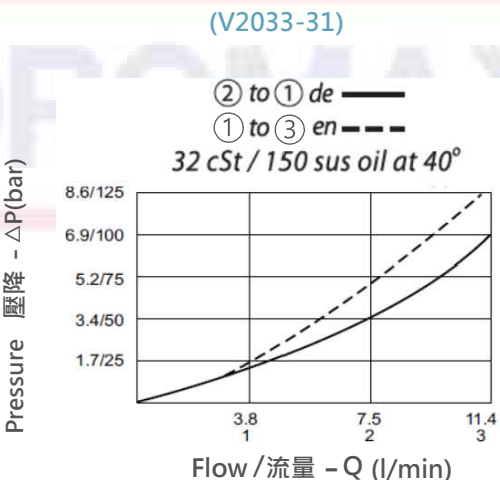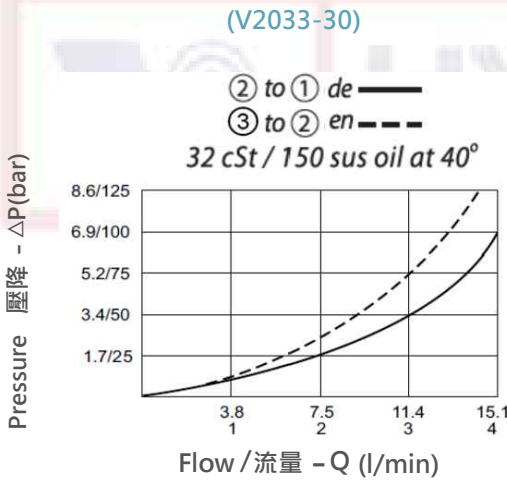


CARTRIDGE SOLENOID CHECK VALVE 插入式電磁止回閥

V2033-T03 (HSV08)

Specifications

技術數據


(V2033-35)

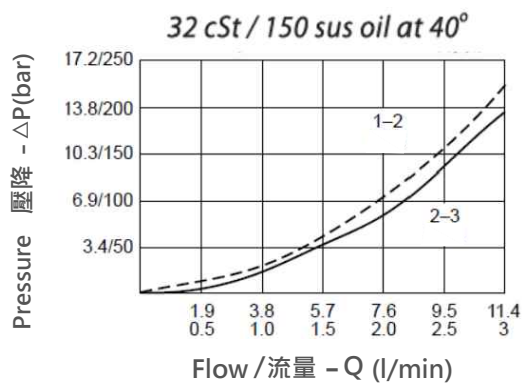

Cavity-Tooling

成型孔

Millimeters (m/m)

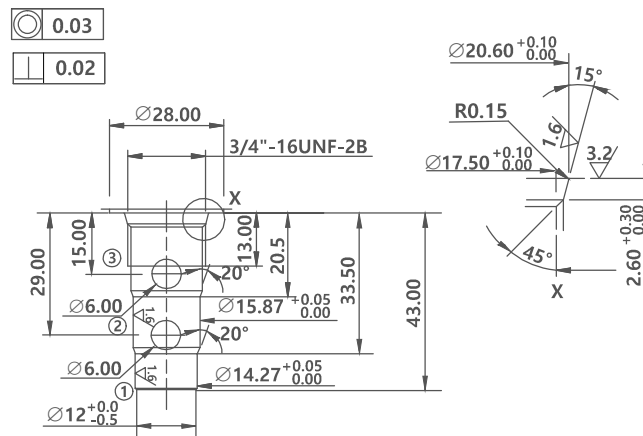

Dimension

外型尺寸圖

Millimeters / (inch)

